



Harley Davidson dealership , Spy, Belgium

SPOTLIGHTS

Concord

- 141 Beacon Tune
- 145 Beacon Projector
- 151 Beacon XL Muse
- 155 Beacon Muse
- 161 Beacon XXL
- 167 Beacon XL
- 171 Beacon LED
- 178 Beacon Major & Minor
- 183 Beacon Wallwash LED
- 187 Beacon Shelf
- 191 LyteLab

Lumiance

- 195 Optimo







Beacon TUNE is the first tuneable white LED spotlight from Concord. Offering unique customisation through 2 on-board potentiometers, colour tuning from a cool 4,300K down to a warm 2,100K and smooth dimming from 100-0%, allowing endusers the ability to tailor the lighting to their exact preference.

The colour and quality of light can greatly influence and determine the way in which artwork, objects or fabrics are visually perceived. Beacon TUNE will bring out the best in displays and exhibitions, with a high CRI of 90, making it the perfect lighting solution for Museums and Galleries.

Beacon Tune



White



Black


- Tuneable white from 4,300K down to a warm 2,100K
- Beacon Tune is a tuneable white LED spotlight - in keeping with the award-winning Beacon design
- Ideal for museum and gallery applications for changing atmosphere from warm to cool using the same spotlight
- Smooth on-board dimming from 100 to 0%
- Individual graduated on-board potentiometers - ensuring consistency and accuracy across all installed fixtures
- Available as a Spot (26°) or Flood (42°) beam option
- Total system power: 23W
- Fixture lumens:
 - Spot (26°) = 1074lm
 - Flood (42°) = 978lm
- High colour rendering index, Ra90
- IR/UV free light source without heat radiation
- Long lifetime: 50,000 hours life at 70% of the original output (L70)

LIGHT SOURCE INCLUDED



Spot


Code	Description	Colour
2059061	BEACON TUNE SPOT O/B DIM L3	White
2059062	BEACON TUNE SPOT O/B DIM L3	Black



Beacon Tune - Spot

Flood

Code	Description	Colour
2059063	BEACON TUNE FLOOD O/B DIM L3	White
2059064	BEACON TUNE FLOOD O/B DIM L3	Black





Beacon Tune - Flood

Accessories

Code	Description	Colour
2059220	BEACON TUNE PEAK	Black
2052940	BEACON BARN DOORS	Black


Legend: O/B DIM = Manual On board dimming; L3 = Three Circuit Track

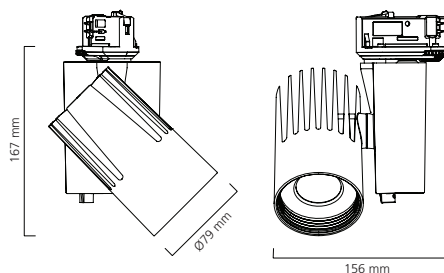

Dimensions (mm)



Compton Verney, Warwickshire, UK

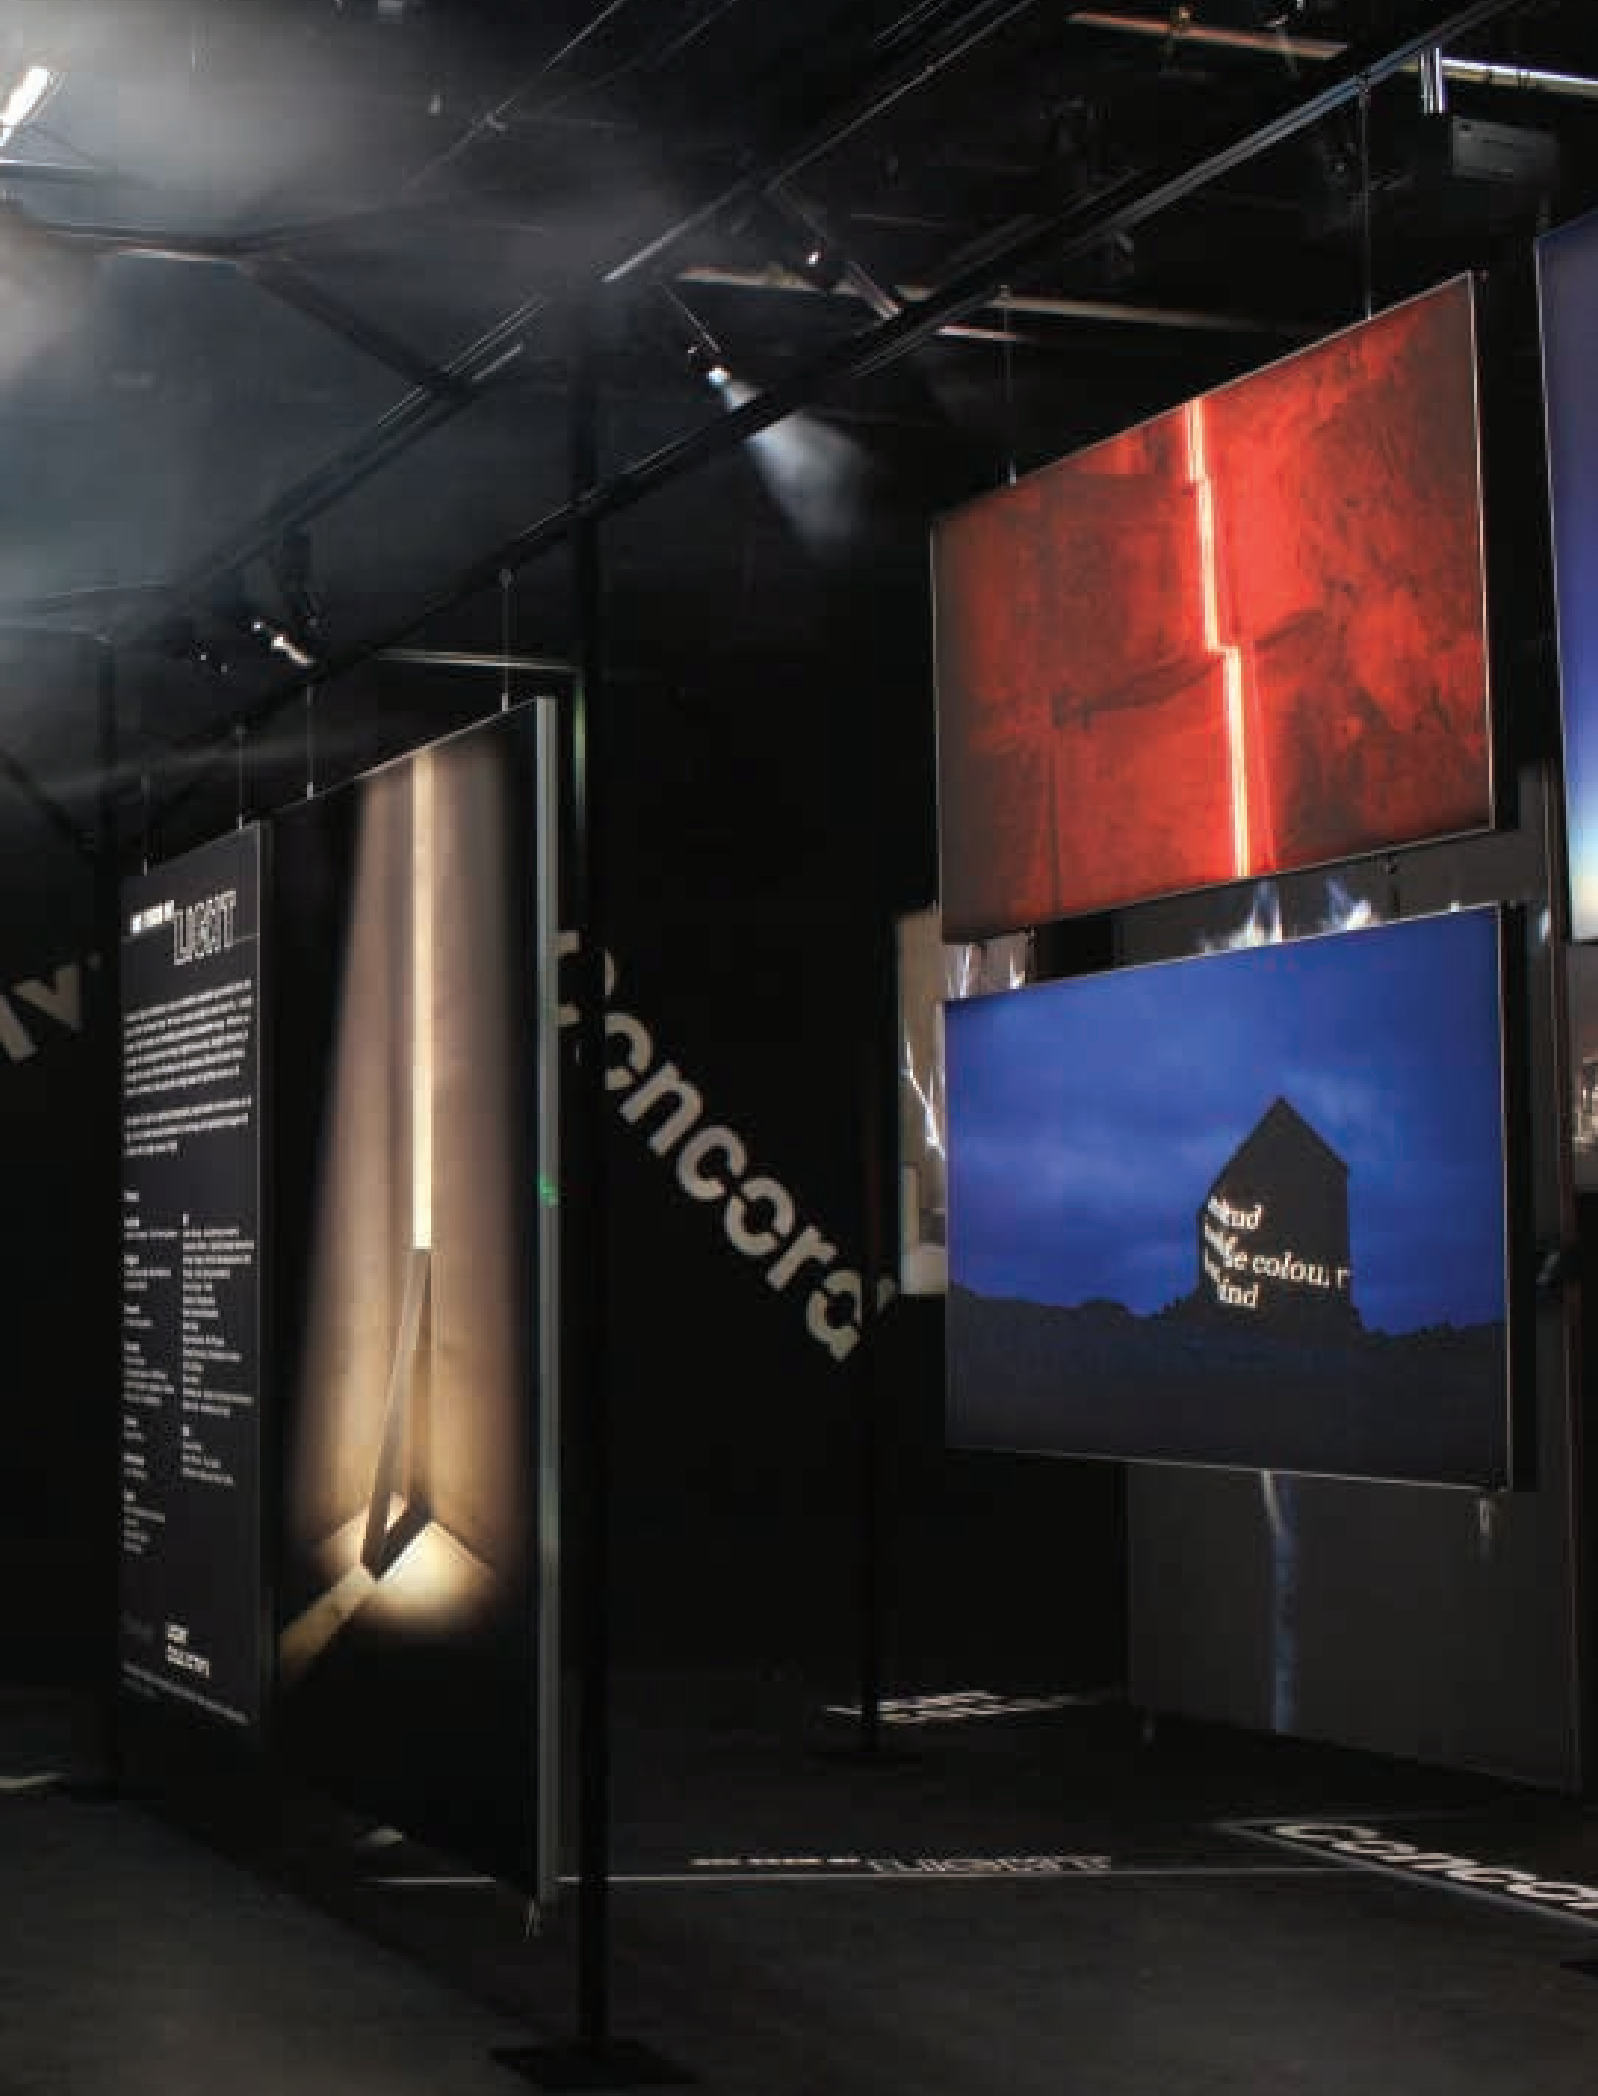

One Beam of Light Exhibition, Concord / Light Collective, London, UK



Beacon Projector is part of the award winning Beacon/Beacon Muse range. Consisting of three versions - Iris, Framing and Gobo. These impressive models meet the requirements for a fully adjustable projector in galleries, museum and retail applications.

Beacon Projector



White Beacon Projector Iris



Black Beacon Projector Iris



Silver Beacon Projector Iris

- The Beacon Projector – Iris combines the award winning Beacon housing with a connecting snoot, manual focusing lens and a high output 26W cutting-edge LED
- The Iris component produces a circular beam which enables smaller objects to be pin pointed with light, where less than a 10° beam is necessary.
- IR/UV – free light source without heat radiation
- High colour rendering index, typical Ra95
- Fully dimmable from 100% to 3% using discrete on-board dimming (DALI 0%)
- Long life up to 50K hours
- Low maintenance and discrete lighting solution


Beacon Projector Iris 3,000K

Code	Description	Colour
2055160	IRIS ADJ DIM L1 3K	White
2055178	IRIS ADJ DIM L3 3K	White
2055196	IRIS ADJ DIM SM 3K	White
2055213	IRIS ADJ L3 DALI 3K	White
2055163	IRIS ADJ DIM L1 3K	Silver
2055181	IRIS ADJ DIM L3 3K	Silver
2055199	IRIS ADJ DIM SM 3K	Silver
2055215	IRIS ADJ L3 DALI 3K	Silver
2055166	IRIS ADJ DIM L1 3K	Black
2055184	IRIS ADJ DIM L3 3K	Black
2055202	IRIS ADJ DIM SM 3K	Black
2055217	IRIS ADJ L3 DALI 3K	Black



Beacon Projector Iris 4,000K

Code	Description	Colour
2055169	IRIS ADJ DIM L1 4K	White
2055187	IRIS ADJ DIM L3 4K	White
2055205	IRIS ADJ DIM SM 4K	White
2055219	IRIS AD L3 DALI 4K	White
2055172	IRIS ADJ DIM L1 4K	Silver
2055190	IRIS ADJ DIM L3 4K	Silver
2055209	IRIS ADJ DIM SM 4K	Silver
2055221	IRIS AD L3 DALI 4K	Silver
2055175	IRIS ADJ DIM L1 4K	Black
2055193	IRIS ADJ DIM L3 4K	Black
2055211	IRIS ADJ DIM SM 4K	Black
2055223	IRIS AD L3 DALI 4K	Black

LIGHT SOURCE INCLUDED



Iris Projector



Dimensions (mm)



Silver Beacon Projector Framing



White Beacon Projector Framing



Black Beacon Projector Framing




- The Beacon Projector – Framing combines the award winning Beacon housing with four adjustable arms allowing the beam to be framed to the desired size shape (square/rectangle – or irregular 4 sided shapes thus framing the object with light
- High output 26W cutting-edge LED
- IR/UV – free light source without heat radiation
- High colour rendering index, typical Ra97, R9 - 90
- Fully dimmable from 100% to 3% using discrete on-board dimming (DALI 0%)
- Long life up to 50K hours
- Low maintenance and discrete lighting solution

LIGHT SOURCE INCLUDED




Beacon Projector Framing 3,000K

Code	Description	Colour
2055136	FRAM O/B DIM L1 3,000K	White
2055177	FRAM O/B DIM L3 3,000K	White
2055195	FRAM O/B DIM SM 3,000K	White
2055154	FRAM DALI L3 3,000K	White
2055162	FRAM O/B DIM L1 3,000K	Silver
2055180	FRAM O/B DIM L3 3,000K	Silver
2055198	FRAM O/B DIM SM 3,000K	Silver
2055155	FRAM DALI L3 3,000K	Silver
2055165	FRAM O/B DIM L1 3,000K	Black
2055183	FRAM O/B DIM L3 3,000K	Black
2055201	FRAM O/B DIM SM 3,000K	Black
2055156	FRAM DALI L3 3,000K	Black




Framing Projector



Beacon Projector Framing 4,000K

Code	Description	Colour
2055168	FRAM O/B DIM L1 4,000K	White
2055186	FRAM O/B DIM L3 4,000K	White
2055204	FRAM O/B DIM SM 4,000K	White
2055157	FRAM DALI L3 4,000K	White
2055171	FRAM O/B DIM L1 4,000K	Silver
2055189	FRAM O/B DIM L3 4,000K	Silver
2055207	FRAM O/B DIM SM 4,000K	Silver
2055158	FRAM DALI L3 4,000K	Silver
2055174	FRAM O/B DIM L1 4,000K	Black
2055192	FRAM O/B DIM L3 4,000K	Black
2055153	FRAM O/B DIM SM 4,000K	Black
2055159	FRAM DALI L3 4,000K	Black

Legend: L1 = Single Circuit; L3 = Three Circuit;
SM = Surface Mount; O/B Dim = Manual On board dimming;
DALI = DALI Track Dimming





Black Projector Gobo



- The Beacon Projector – Gobo gives the ability to project an image, pattern or wording onto most surfaces.
- Ideal for retail and display environments
- 3 types of Gobo material can be inserted:
 - acetate
 - metal
 - glass
- High output 26W cutting-edge LED
- IR/UV – free light source without heat radiation
- High colour rendering index, typical Ra97, R9 - 90
- Fully dimmable from 100% to 3% using discrete on-board dimming (DALI 0%)
- Long life up to 50K hours
- Low maintenance and discrete lighting solution

Beacon Projector Gobo 3,000K


Code	Description	Colour
2055161	GOBO O/B DIM L1 3,000K	White
2055179	GOBO O/B DIM L3 3,000K	White
2055197	GOBO O/B DIM SM 3,000K	White
2055214	GOBO DALI L3 3,000K	White
2055164	GOBO O/B DIM L1 3,000K	Silver
2055182	GOBO O/B DIM L3 3,000K	Silver
2055200	GOBO O/B DIM SM 3,000K	Silver
2055216	GOBO DALI L3 3,000K	Silver
2055167	GOBO O/B DIM L1 3,000K	Black
2055185	GOBO DALI L3 L3 3,000K	Black
2055203	GOBO O/B DIM SM 3,000K	Black
2055218	GOBO DALI L3 3,000K	Black

Beacon Projector Gobo 4,000K


Code	Description	Colour
2055170	GOBO O/B DIM L1 4,000K	White
2055188	GOBO O/B DIM L3 4,000K	White
2055206	GOBO O/B DIM SM 4,000K	White
2055220	GOBO DALI L3 4,000K	White
2055173	GOBO O/B DIM L1 4,000K	Silver
2055191	GOBO O/B DIM L3 4,000K	Silver
2055210	GOBO O/B DIM SM 4,000K	Silver
2055222	GOBO DALI L3 4,000K	Silver
2055176	GOBO O/B DIM L1 4,000K	Black
2055194	GOBO O/B DIM L3 4,000K	Black
2055212	GOBO O/B DIM SM 4,000K	Black
2055224	GOBO DALI L3 4,000K	Black

Legend: L1 = Single Circuit; L3 = Three Circuit;
SM = Surface Mount; O/B Dim = Manual On board dimming;
DALI = DALI Track Dimming

LIGHT SOURCE INCLUDED





GoboHolder(with20mmimage)



Light level not taken.
Dependant on image

Note: to purchase Gobos please contact Rosco Limited:
www.rosco.com

Size 'D' Diameter 53.3mm

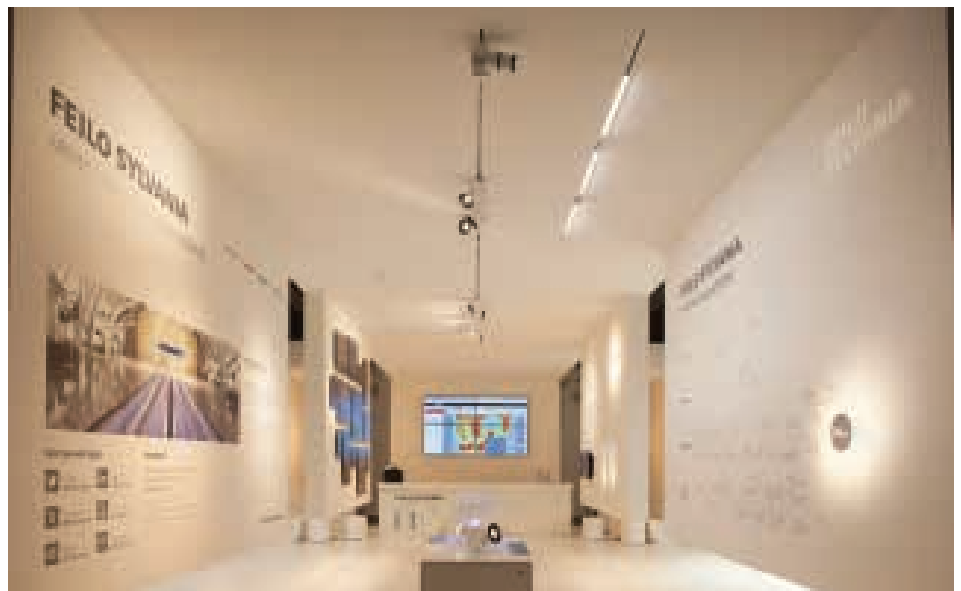


Feilo Sylvania booth at Light + Building 2016 - Frankfurt, Germany





Compton Verney Art Gallery, Gaydon, UK

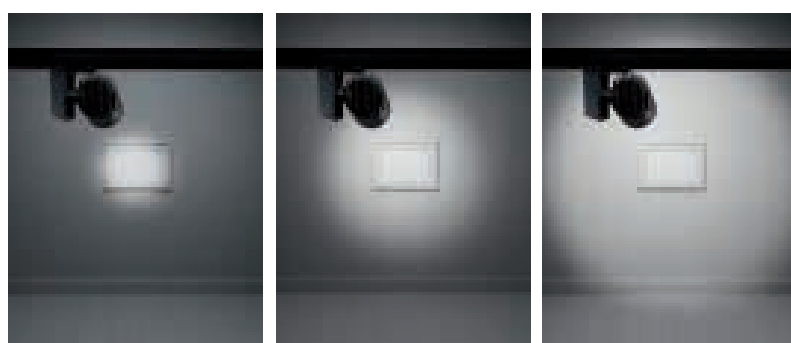

Narrow beam

Medium Beam

Wide Beam

Beacon XL Muse is a new addition to the innovative and award winning Beacon Muse range of spotlights. Beacon XL Muse introduces an exciting new accent and display lighting concept using cutting-edge LED technology and ancient lens principles to create a fully adjustable spotlight. The soft-touch ring enables the end-user to manually adjust the beam to from a wide flood (70°) down to a tight spot (10°); without the need of any additional lenses or reflectors.

Beacon XL Muse boasts a super high CRI of Ra97 with the R9 value at 90 - ensuring vibrant reds - the ideal spotlight for museum, gallery and retail applications where a high quality of light is required. Available with on-board, DALI or Bluetooth dimming. Bluetooth is a wireless technology that enables the end-user to easily control the light output via their smart device.



Bluetooth
enabled

Beacon XL Muse



Beacon XL Muse - White



Beacon XL Muse - Black

- Unique adjustability using soft-touch ring, enables beam control from a 10° spot to a 70° flood

	3,000K	4,000K
Flood 70 deg	2,544lm	2,884lm
Spot 10 deg	820lm	901lm

- Ideal for museum, gallery and retail applications
- Super high colour rendering index, Ra 97 typical
- Available in 3,000K or 4,000K colour temperatures
- On-board dimming, DALI or Bluetooth versions available
- For mounting on 3-circuit track (Lytespan 3)
- White or Black paint finishes as standard. Other colour available on request.
- Barn doors, Elongation lens, Honeycomb and Snoot accessories available
- IR/UV free light source without heat radiation
- Long lifetime: 50,000 hours life at 70% of the original output (L70)

Beacon XL MUSE - 3000K (97CRI)


Code	Description	Colour
On-board dim		
2059319	XL MUSE 3K O/B DIM L3 WHT	White
2059320	XL MUSE 3K O/B DIM L3 BLK	Black
DALI		
2059323	XL MUSE 3K DALI L3 WHT	White
2059324	XL MUSE 3K DALI L3 BLK	Black
Bluetooth		
2059327	XL MUSE 3K BLE DIM L3 WHT	White
2059328	XL MUSE 3K BLE DIM L3 BLK	Black

Beacon XL MUSE - 4000K (97CRI)


Code	Description	Colour
On-board dim		
2059321	XL MUSE 4K O/B DIM L3 WHT	White
2059322	XL MUSE 4K O/B DIM L3 BLK	Black
DALI		
2059325	XL MUSE 4K DALI L3 WHT	White
2059326	XL MUSE 4K DALI L3 BLK	Black
Bluetooth		
2059329	XL MUSE 4K BLE DIM L3 WHT	White
2059330	XL MUSE 4K BLE DIM L3 BLK	Black

Legend: O/B DIM = On-Board DIMming; L3 = Lytespan 3; BLE = Bluetooth; WHT = WHiTe; BLK = BLAcK


LIGHT SOURCE INCLUDED




Bluetooth enabled




3,000K Spot




3,000K Wide



4,000K Spot



4,000K Flood

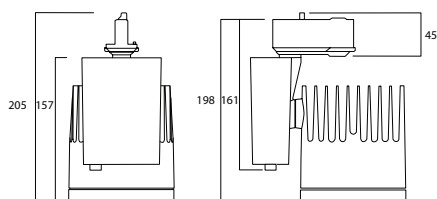


Beacon XL Muse - adjustable beam from 10° spot to 70° flood




Accessories





Elongation lens




Honeycomb



Snoot



Barn doors



Accessories


Code	Description
2093113	XL MUSE ELONGATION LENS
2093114	XL MUSE HONEYCOMB BLK
2058323	XL MUSE BARN DOOR BLK
2058326	XL MUSE SNOOT BLK

Feilo Sylvania - Bluetooth dimming

- Wireless dimming of single or multiple luminaires with simple touch gestures on your smart phone
- Automatically form a wireless mesh network with the other Casambi enabled luminaires
- Set up simple or complex scenarios with single or multiple luminaires in them. All the luminaires in one scene can have different light levels according to the needs of the end-user.
- Define the security of the network. There are four different security levels for access control.
- Control luminaires visually, by adding photographs into the app to virtually recreate the room
- The Feilo Sylvania enabled luminaires use Bluetooth Low Energy to form the direct connection and interaction between a mobile device and the luminaires
- Free app is available to download on iPhone and Android devices




Bluetooth enabled

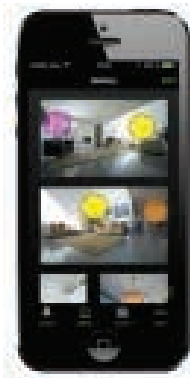





Pushkin Museum - Moscow, Russia



Beacon Muse adjustable optics providing 10 degree tight spot for accent lighting for accentuating the texture, colour and shape of exhibits



Beacon Muse optics optimised to provide a 65 degree wide flood distribution for uniform vertical and horizontal illuminance and wall washing effects



Beacon Muse with Elongation Lens accessory to be used with narrow beam angles for highlighting sculptures, mannequins, logos and shelving

The Beacon Muse LED introduces an exciting accent and display lighting concept using cutting-edge LED technology and adjustable lens to create a fully adjustable spotlight. Adjustable from a 10 degree spotlight to a 65 degree floodlight with out additional lens or reflectors.

The versatility of Beacon Muse means that the designer has a completely flexible lighting tool for any environment or application. Muse is a true revolution in accent and display spotlighting.

Beacon Muse



- Fully adjustable spotlight using cutting edge LED technology and adjustable lens
- Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses and reflectors
- 3,000K 201lm 10 deg to 480lm 65 deg
- Cast cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV – free light source without heat radiation
- On-board dimming available
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Choice of colour temperature warm 3,000K & neutral 4,000K
- Beacon Muse offers high CRI minimum 90 (typical 95) ideal for museum, galleries and high end shop lighting applications

LIGHT SOURCE INCLUDED



3,000K Trailing edge dimmable - 13W

Code	Description	Colour
2051046	Muse Single Circuit	White
2051049	Muse Three Circuit	White
2051052	Muse Surface Mounted	White
2051047	Muse Single Circuit	Silver
2051050	Muse Three Circuit	Silver
2051053	Muse Surface Mounted	Silver
2051048	Muse Single Circuit	Black
2051051	Muse Three Circuit	Black
2051054	Muse Surface Mounted	Black

3,000K on-board dimming - 13W

Code	Description	Colour
2051064	Muse O/B DIM Single Circuit	White
2051067	Muse O/B DIM Three Circuit	White
2051070	Muse O/B DIM Surface Mounted	White
2051065	Muse O/B DIM Single Circuit	Silver
2051068	Muse O/B DIM Three Circuit	Silver
2051071	Muse O/B DIM Surface Mounted	Silver
2051066	Muse O/B DIM Single Circuit	Black
2051069	Muse O/B DIM Three Circuit	Black
2051072	Muse O/B DIM Surface Mounted	Black

4,000K Trailing edge dimmable - 13W

Code	Description	Colour
2051055	Muse Single Circuit	White
2051058	Muse Three Circuit	White
2051061	Muse Surface Mounted	White
2051056	Muse Single Circuit	Silver
2051059	Muse Three Circuit	Silver
2051062	Muse Surface Mounted	Silver
2051057	Muse Single Circuit	Black
2051060	Muse Three Circuit	Black
2051463	Muse Surface Mounted	Black

4,000K on-board dimming - 13W


Code	Description	Colour
2051073	Muse O/B DIM. Single Circuit	White
2051076	Muse O/B DIM. Three Circuit	White
2051079	Muse Adj. Surface Mounted	White
2051074	Muse O/B DIM Single Circuit	Silver
2051077	Muse O/B DIM Three Circuit	Silver
2051080	Muse O/B DIM Surface Mounted	Silver
2051075	Muse O/B DIM Single Circuit	Black
2051078	Muse O/B DIM Three Circuit	Black
2051472	Muse O/B DIM Surface Mounted	Black




Versailles museum - Versailles, France

Accessories


Code	Description
2047193	Elongation Lens
2049498	Coloured Gel Filters (red, yellow and blue)
2052940	Adjustable Barn Doors



Dimensions (mm)

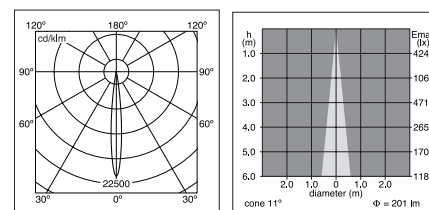

3000K

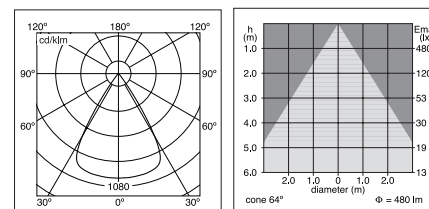

3000K


3000K

3000K




- Adjustable optics provides wide flood 65° which can be adjusted to 10° spot without the need for additional lenses and reflectors
- 3,000K focused @ 10° 390lm
4,000K focused @ 65° 925lm
- Beacon Muse offers high CRI minimum typical 97 ideal for museums, galleries and high end shop lighting applications
- For even more accurate colour reproduction our R9 figure is now typically 90
- Fully adjustable spotlight using cutting edge LED technology and adjustable lens
- Cast cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV – free light source without heat radiation
- On-board dimming available
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Choice of colour temperature warm 3,000K & neutral 4,000K


LIGHT SOURCE INCLUDED



10° narrow 3,000K



35° medium 3,000K



65° flood 3,000K



Barn Doors Accessory

3,000K Trailing edge dimmable - 26W

Code	Description	Colour
2052843	Muse Single Circuit	White
2052849	Muse Three Circuit	White
2052855	Muse Surface Mounted	White
2052844	Muse Single Circuit	Silver
2052850	Muse Three Circuit	Silver
2052856	Muse Surface Mounted	Silver
2052845	Muse Single Circuit	Black
2052851	Muse Three Circuit	Black
2052857	Muse Surface Mounted	Black

4,000K Trailing edge dimmable - 26W

Code	Description	Colour
2052846	Muse Single Circuit	White
2052852	Muse Three Circuit	White
2052858	Muse Surface Mounted	White
2052847	Muse Single Circuit	Silver
2052853	Muse Three Circuit	Silver
2052859	Muse Surface Mounted	Silver
2052848	Muse Single Circuit	Black
2052854	Muse Three Circuit	Black
2052860	Muse Surface Mounted	Black

3,000K on-board dimming - 26W

Code	Description	Colour
2052861	Muse O/B DIM Single Circuit	White
2052867	Muse O/B DIM Three Circuit	White
2052873	Muse O/B DIM Surface Mounted	White
2052862	Muse O/B DIM Single Circuit	Silver
2052868	Muse O/B DIM Three Circuit	Silver
2052874	Muse O/B DIM Surface Mounted	Silver
2052863	Muse O/B DIM Single Circuit	Black
2052869	Muse O/B DIM Three Circuit	Black
2052875	Muse O/B DIM Surface Mounted	Black


4,000K on-board dimming - 26W

Code	Description	Colour
2052864	Muse O/B DIM Single Circuit	White
2052870	Muse O/B DIM Three Circuit	White
2052876	Muse O/B DIM Surface Mounted	White
2052865	Muse O/B DIM Single Circuit	Silver
2052871	Muse O/B DIM Three Circuit	Silver
2052877	Muse O/B DIM Surface Mounted	Silver
2052866	Muse O/B DIM Single Circuit	Black
2052872	Muse O/B DIM Three Circuit	Black
2052878	Muse O/B DIM Surface Mounted	Black

Accessories

Code	Description
2047193	Elongation Lens
2049498	Coloured Gel Filters (red, yellow and blue)
2052940	Adjustable Barn Doors

70

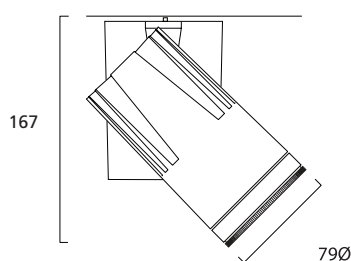

Dimensions (mm)



Kuskovo The State Museum of Ceramics - Moscow, Russia



Beacon Muse - White



Beacon Muse - Black


- Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses and reflectors
3,000K focused @ 10° 390lm
4,000K focused @ 65° 925lm
- Beacon Muse offers high CRI, typical 97 (26W model) ideal for museums, galleries and high end shop lighting applications
- For even more accurate colour reproduction our R9 figure is now typically 90
- Fully adjustable spotlight using cutting edge LED technology and adjustable lens
- Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses and reflectors
- Cast cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV – free light source without heat radiation
- DALI dimmable as standard from 100-0% output
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Choice of colour temperature warm 3,000K & neutral 4,000K

LIGHT SOURCE INCLUDED




DALI Beacon Muse LED - 13W

Code	Description	Colour
2051570	3,000K Adjustable DALI	White
2051573	4,000K Adjustable DALI	White
2051571	3,000K Adjustable DALI	Silver
2051574	4,000K Adjustable DALI	Silver
2051572	3,000K Adjustable DALI	Black
2051575	4,000K Adjustable DALI	Black




3,000K




3,000K

DALI Beacon Muse LED - 26W


Code	Description	Colour
2052934	3,000K Adjustable DALI	White
2052937	4,000K Adjustable DALI	White
2052935	3,000K Adjustable DALI	Silver
2052938	4,000K Adjustable DALI	Silver
2052936	3,000K Adjustable DALI	Black
2052939	4,000K Adjustable DALI	Black




3,000K




3,000K



3,000K



3,000K

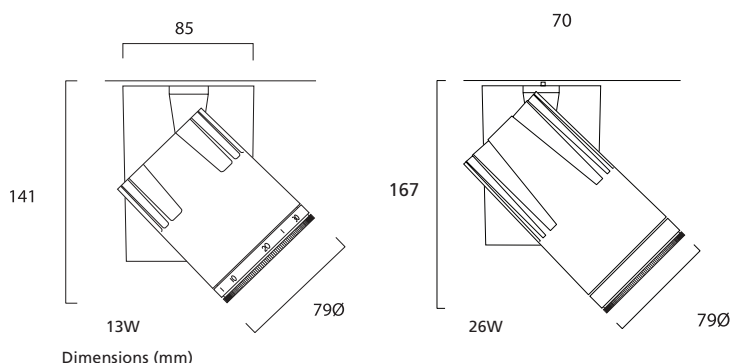







Beacon XXL is set to revolutionise retail and display lighting. A performance powerhouse, Beacon XXL can deliver an impressive output of 5762lm and a high quality, high intensity lit effect. A variety of CRIs, colour temperature and dimming options make the Beacon XXL the perfect LED replacement for traditional 70W CMI solutions.

Beacon XXL




Narrow Beam - Black



Medium Beam - Black



Wide Beam - Black



On board dimming

- Beacon XXL is an LED replacement for traditional 70W CMI spotlights, with an impressive output of up to 5762 fixture lumens
- Ideal for double height spaces, retail and display applications
- High colour rendering index, Ra 93 or 85 typical
- Available in 3000K or 4000K colour temperatures
- Non dimmable, On-board dimming and DALI versions available
- Narrow (21°), Medium (50°) or Wide (67°) beam options
- For mounting on 3-circuit track (Lytespan 3)
- White or Black paint finishes as standard. Other colour available on request.
- Barn doors, Elongation lens, Honeycomb and Snoot accessories available
- IR/UV free light source without heat radiation
- Energy Class: A++, A+, A
- Long lifetime: 50,000 hours life at 70% of the original output (L70)
- LED technology provides an energy efficient solution with reduced maintenance costs

3,000K (93CRI)

Code	Description	Finish
21° Narrow Beam		
2092990	BCON XXL NB 3K L3 BLK	Black
2092991	BCON XXL NB 3K L3 WHT	White
2092992	BCON XXL NB O/B DIM 3K L3 BLK	Black
2092993	BCON XXL NB O/B DIM 3K L3 WHT	White
2092994	BCON XXL NB DALI 3K L3 BLK	Black
2092995	BCON XXL NB DALI 3K L3 WHT	White

50° Medium Beam

2093004	BCON XXL MB 3K L3 BLK	Black
2093005	BCON XXL MB 3K L3 WHT	White
2093006	BCON XXL MB O/B DIM 3K L3 BLK	Black
2093007	BCON XXL MB O/B DIM 3K L3 WHT	White
2093008	BCON XXL MB DALI 3K L3 BLK	Black
2093009	BCON XXL MB DALI 3K L3 WHT	White

67° Wide Beam

2093018	BCON XXL WB 3K L3 BLK	Black
2093019	BCON XXL WB 3K L3 WHT	White
2093020	BCON XXL WB O/B DIM 3K L3 BLK	Black
2093021	BCON XXL WB O/B DIM 3K L3 WHT	White
2093022	BCON XXL WB DALI 3K L3 BLK	Black
2093023	BCON XXL WB DALI 3K L3 WHT	White

4,000K (93CRI)

Code	Description	Finish
21° Narrow Beam		
2093032	BCON XXL NB 4K L3 BLK	Black
2093033	BCON XXL NB 4K L3 WHT	White
2093034	BCON XXL NB O/B DIM 4K L3 BLK	Black
2093035	BCON XXL NB O/B DIM 4K L3 WHT	White
2093036	BCON XXL NB DALI 4K L3 BLK	Black
2093037	BCON XXL NB DALI 4K L3 WHT	White

50° Medium Beam


2093046	BCON XXL MB 4K L3 BLK	Black
2093047	BCON XXL MB 4K L3 WHT	White
2093048	BCON XXL MB O/B DIM 4K L3 BLK	Black
2093049	BCON XXL MB O/B DIM 4K L3 WHT	White
2093050	BCON XXL MB DALI 4K L3 BLK	Black
2093051	BCON XXL MB DALI 4K L3 WHT	White

67° Wide Beam


2093060	BCON XXL WB 4K L3 BLK	Black
2093061	BCON XXL WB 4K L3 WHT	White
2093062	BCON XXL WB O/B DIM 4K L3 BLK	Black
2093063	BCON XXL WB O/B DIM 4K L3 WHT	White
2093064	BCON XXL WB DALI 4K L3 BLK	Black
2093065	BCON XXL WB DALI 4K L3 WHT	White

Legend: BCON = Beacon; NB = Narrow Beam; MB = Medium Beam; WB = Wide Beam; HO = High Output; O/B DIM = On-Board Dimming; L3 = Lytespan 3 track; WHT = White; BLK = Black


LIGHT SOURCE INCLUDED

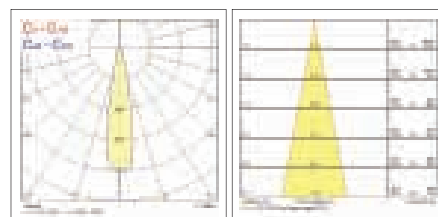

4,000K - Narrow Beam

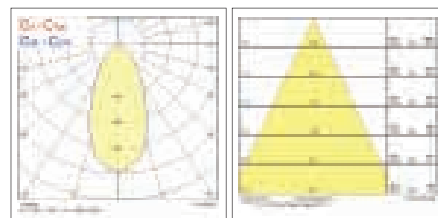


4,000K, Medium Beam

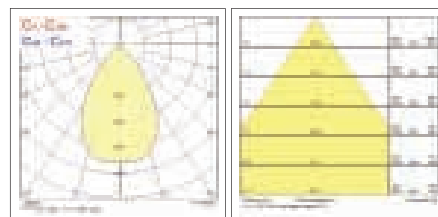


4,000K, Wide beam

Beacon XXL



Beacon XXL On-boarding dimming



Dimensions (mm)



Narrow Beam - White



Medium Beam - White



Wide Beam - White

- Beacon XXL is an LED replacement for traditional 70W CMI spotlights, with an impressive output of up to 5,762 fixture lumens
- Ideal for double height spaces, retail and display applications
- High colour rendering index, Ra 93 or 85 typical
- Available in 3000K or 4000K colour temperatures
- Non dimmable, On-board dimming and DALI versions available
- Narrow (21°), Medium (50°) or Wide (67°) beam options
- For mounting on 3-circuit track (Lytespan 3)
- White or Black paint finishes as standard. Other colour available on request.
- Barn doors, Elongation lens, Honeycomb and Snoot accessories available
- IR/UV free light source without heat radiation
- Energy Class: A++, A+, A
- Long lifetime: 50,000 hours life at 70% of the original output (L70)
- LED technology provides an energy efficient solution with reduced maintenance costs

LIGHT SOURCE INCLUDED



3,000K (85CRI) - High Output

Code	Description	Finish
21° Narrow Beam		
2059307	BCON XXL NB HO 3K L3 BLK	Black
2059308	BCON XXL NB HO 3K L3 WHT	White

50° Medium Beam

2059311	BCON XXL MB HO 3K L3 BLK	Black
2059312	BCON XXL MB HO 3K L3 WHT	White

67° Wide Beam

2059315	BCON XXL WB HO 3K L3 BLK	Black
2059316	BCON XXL WB HO 3K L3 WHT	White

4,000K (85CRI) - High Output

Code	Description	Finish
21° Narrow Beam		
2059309	BCON XXL NB HO 4K L3 BLK	Black
2059310	BCON XXL NB HO 4K L3 WHT	White

50° Medium Beam


2059313	BCON XXL MB HO 4K L3 BLK	Black
2059314	BCON XXL MB HO 4K L3 WHT	White

67° Wide Beam


2059317	BCON XXL WB HO 4K L3 BLK	Black
2059318	BCON XXL WB HO 4K L3 WHT	White

Legend: BCON = Beacon; NB = Narrow Beam; MB = Medium Beam; WB = Wide Beam; HO = High Output; O/B DIM = On-Board DIMming; L3 = Lytespan 3 track; WHT = White; BLK = Black


Beacon XXL




Dimensions (mm)

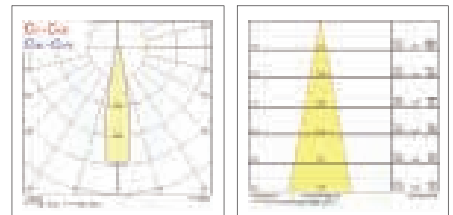

4,000K - Narrow Beam - High Output

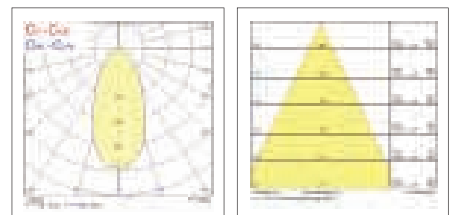


4,000K - Medium Beam - High Output

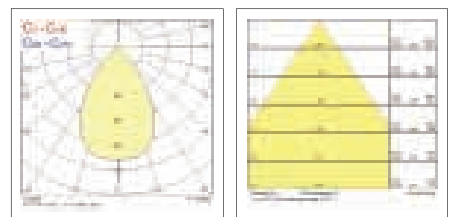


4,000K - Wide Beam - High Output

Accessories




Barn Doors








Elongation Lens



Honeycomb



Snoot



Dimensions (mm)

Accessories

Code	Description
2058323	Beacon XXL Barn Doors BLK
2058324	Beacon XXL Elongation Lens
2058325	Beacon XXL Honeycomb BLK
2058326	Beacon XXL Snoot BLK



Elephane Paname, Paris, France





Beacon XL is the latest edition to Concord's award-winning Beacon family. This impressive LED spotlight pushes the boundaries of technology to provide up to 3300 fixture lumens at 42 Watts. Design specifically for shop and display applications, the stylish Beacon XL replaces CMI-T (HID) luminaires and delivers a CRI of 85 (CRI of 97 available on request). Available in black and white, track (L1 / L3) and surface mounted options - 3,000K or 4,000K. Dependent upon your application a variety of beam angles: 12° narrow, 25° medium and 50° wide beams are standard. Beacon XL is also available in non-dimmable, on-board dimming and DALI dimming models.

Beacon XL



- Contemporary all die-cast design
- High Powered 38W LED Spotlight (42W total power) with equivalent output to a traditional 35W CMI lamp (39W lamp + ~4.5W gear, total wattage ~43.5W)
- Available with 12 degree Narrow, 25 degree Medium or 50 degree Flood lens
- Barn Doors, Elongation Lens and snoot accessories to customise display or accent interiors
- White and black housing as standard, Ideal for Retail and Museum applications

Narrow Beam 12° - 3,000K

Code	Description
2058233	Beacon XL NB 3K L1 BLK
2058234	Beacon XL NB 3K L1 WHT
2058235	Beacon XL NB O/B DIM 3K L1 BLK
2058236	Beacon XL NB O/B DIM 3K L1 WHT
2058237	Beacon XL NB 3K L3 BLK
2058238	Beacon XL NB 3K L3 WHT
2058239	Beacon XL NB O/B DIM 3K L3 BLK
2058240	Beacon XL NB O/B DIM 3K L3 WHT
2058241	Beacon XL NB DALI 3K L3 BLK
2058242	Beacon XL NB DALI 3K L3 WHT
2058243	Beacon XL NB 3K SM BLK
2058244	Beacon XL NB 3K SM WHT
2058245	Beacon XL NB O/B DIM 3K SM BLK
2058246	Beacon XL NB O/B DIM 3K SM WHT

Medium Beam 25° - 3,000K

Code	Description
2058247	Beacon XL MB 3K L1 BLK
2058248	Beacon XL MB 3K L1 WHT
2058249	Beacon XL MB O/B DIM 3K L1 BLK
2058250	Beacon XL MB O/B DIM 3K L1 WHT
2058251	Beacon XL MB 3K L3 BLK
2058252	Beacon XL MB 3K L3 WHT
2058253	Beacon XL MB O/B DIM 3K L3 BLK
2058254	Beacon XL MB O/B DIM 3K L3 WHT
2058255	Beacon XL MB DALI 3K L3 BLK
2058256	Beacon XL MB DALI 3K L3 WHT
2058257	Beacon XL MB 3K SM BLK
2058258	Beacon XL MB 3K SM WHT
2058259	Beacon XL MB O/B DIM 3K SM BLK
2058260	Beacon XL MB O/B DIM 3K SM WHT

Wide Beam 50° - 3,000K



Code	Description
2058261	Beacon XL WB 3K L1 BLK
2058262	Beacon XL WB 3K L1 WHT
2058263	Beacon XL WB O/B DIM 3K L1 BLK
2058264	Beacon XL WB O/B DIM 3K L1 WHT
2058265	Beacon XL WB 3K L3 BLK
2058266	Beacon XL WB 3K L3 WHT
2058267	Beacon XL WB O/B DIM 3K L3 BLK
2058268	Beacon XL WB O/B DIM 3K L3 WHT
2058269	Beacon XL WB DALI 3K L3 BLK
2058270	Beacon XL WB DALI 3K L3 WHT
2058271	Beacon XL WB 3K SM BLK
2058272	Beacon XL WB 3K SM WHT
2058273	Beacon XL WB O/B DIM 3K SM BLK
2058274	Beacon XL WB O/B DIM 3K SM WHT

O / B: On-board dimming



Accessories

Code	Description
2058323	Beacon XL Barn Doors BLK
2058324	Beacon XL Elongation Lens
2058326	Beacon XL Snoot



LIGHT SOURCE INCLUDED




3,000K, Narrow beam



3,000K, Medium beam



3,000K, Wide beam

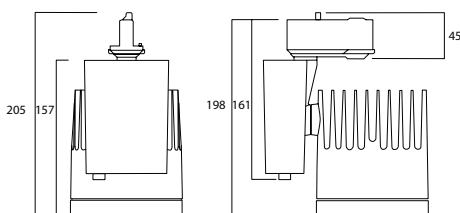

Dimensions (mm)



- Contemporary all die-cast design
- High Powered 38W LED Spotlight (42W total power) with equivalent output to a traditional 35W CMI lamp (39W lamp + ~4.5W gear, total wattage ~43.5W)
- Available with 12 degree Narrow, 25 degree Medium or 50 degree Flood lens
- Barn Doors, Elongation Lens and snoot accessories to customise display or accent interiors
- White and black housing as standard, Ideal for Retail and Museum applications

Narrow Beam 12° - 4,000K

Code	Description
2058275	Beacon XL NB 4K L1 BLK
2058276	Beacon XL NB 4K L1 WHT
2058277	Beacon XL NB O/B DIM 4K L1 BLK
2058278	Beacon XL NB O/B DIM 4K L1 WHT
2058279	Beacon XL NB 4K L3 BLK
2058280	Beacon XL NB 4K L3 WHT
2058281	Beacon XL NB O/B DIM 4K L3 BLK
2058282	Beacon XL NB O/B DIM 4K L3 WHT
2058283	Beacon XL NB DALI 4K L3 BLK
2058284	Beacon XL NB DALI 4K L3 WHT
2058285	Beacon XL NB 4K SM BLK
2058286	Beacon XL NB 4K SM WHT
2058287	Beacon XL NB O/B DIM 4K SM BLK
2058288	Beacon XL NB O/B DIM 4K SM WHT

Medium Beam 25° - 4,000K

Code	Description
2058289	Beacon XL MB 4K L1 BLK
2058290	Beacon XL MB 4K L1 WHT
2058291	Beacon XL MB O/B DIM 4K L1 BLK
2058292	Beacon XL MB O/B DIM 4K L1 WHT
2058293	Beacon XL MB 4K L3 BLK
2058294	Beacon XL MB 4K L3 WHT
2058295	Beacon XL MB O/B DIM 4K L3 BLK
2058296	Beacon XL MB O/B DIM 4K L3 WHT
2058297	Beacon XL MB DALI 4K L3 WHT
2058298	Beacon XL MB DALI 4K L3 BLK
2058299	Beacon XL MB 4K SM BLK
2058300	Beacon XL MB 4K SM WHT
2058301	Beacon XL MB O/B DIM 4K SM BLK
2058302	Beacon XL MB O/B DIM 4K SM WHT

Wide Beam 50° - 4,000K



Code	Description
2058303	Beacon XL WB 4K L1 BLK
2058304	Beacon XL WB 4K L1 WHT
2058305	Beacon XL WB O/B DIM 4K L1 BLK
2058306	Beacon XL WB O/B DIM 4K L1 WHT
2058307	Beacon XL WB 4K L3 BLK
2058308	Beacon XL WB 4K L3 WHT
2058309	Beacon XL WB O/B DIM 4K L3 BLK
2058310	Beacon XL WB O/B DIM 4K L3 WHT
2058311	Beacon XL WB DALI 4K L3 BLK
2058312	Beacon XL WB DALI 4K L3 WHT
2058313	Beacon XL WB 4K SM BLK
2058314	Beacon XL WB 4K SM WHT
2058315	Beacon XL WB O/B DIM 4K SM BLK
2058316	Beacon XL WB O/B DIM 4K SM WHT

O / B: On-board dimming



Accessories

Code	Description
2058323	Beacon XL Barn Doors BLK
2058324	Beacon XL Elongation Lens
2058326	Beacon XL Snoot



LIGHT SOURCE INCLUDED




4,000K, Narrow beam



4,000K Medium beam



4,000K, Wide beam

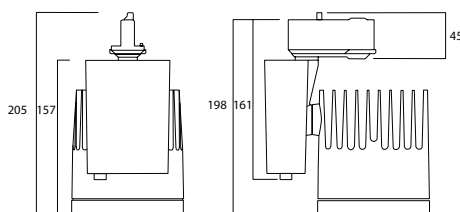

Dimensions (mm)





Cottingham Church, UK



The Concord Beacon range of Spotlights is one of the most comprehensive on the market, offering both new cutting-edge LED technology and a wide selection of traditional lamp sources, providing complete versatility for display and accent lighting applications. Beacon introduces a timeless but contemporary all die-cast aluminium design based around simple geometric shapes offering a selection of beam angles and additional filters and accessories to complete the range.

The Beacon LED spotlight introduces a new lighting dimension to retail and display spaces. Beacon meets the tough demands of these environments by providing good colour rendering, zero UV/IR radiation, reduction in maintenance costs and an energy saving solution over existing lamp sources such as low voltage halogen.

Beacon



Adjustable Barn Doors

- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Cutting-edge cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV - free light source without heat radiation
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming from 100-3% output
- Fresnel lens for collimating narrow beam for accent lighting
- Available in 10° Spot and 30° Flood options
- Choice of colour temperature warm 3,000K & neutral 4,000K
- Beacon offers high CRI, minimum 80 (typical 85), ideal for museums, galleries and high end shop lighting applications

Beacon LED Spot 3,000K

Code	Description	Colour
2048776	Trailing Edge Single Circuit	White
2048807	On board Dimming Single Circuit	White
2048764	Trailing Edge Three Circuit	White
2048788	On board Dimming Three Circuit	White
2048777	Trailing Edge Single Circuit	Silver
2049457	On board Dimming Single Circuit	Silver
2048765	Trailing Edge Three Circuit	Silver
2048789	On board Dimming Three Circuit	Silver
2048778	Trailing Edge Single Circuit	Black
2049458	On board Dimming Single Circuit	Black
2048766	Trailing Edge Three Circuit	Black
2048790	On board Dimming Three Circuit	Black

Beacon LED Spot 4,000K

Code	Description	Colour
2048779	Trailing Edge Single Circuit	White
2049459	On board Dimming Single Circuit	White
2048767	Trailing Edge Three Circuit	White
2048791	On board Dimming Three Circuit	White
2048780	Trailing Edge Single Circuit	Silver
2049460	On board Dimming Single Circuit	Silver
2048768	Trailing Edge Three Circuit	Silver
2048792	On board Dimming Three Circuit	Silver
2048781	Trailing Edge Single Circuit	Black
2049461	On board Dimming Single Circuit	Black
2048769	Trailing Edge Three Circuit	Black
2048793	On board Dimming Three Circuit	Black

Beacon LED Spot DALI

Code	Description	Colour
2051558	13W 3,000K DALI	White
2051561	13W 4,000K DALI	White
2051559	13W 3,000K DALI	Silver
2051562	13W 4,000K DALI	Silver
2051560	13W 3,000K DALI	Black
2051563	13W 4,000K DALI	Black


Monopoint for surface mounting on to ceiling and walls

Code	Description	Colour
3020010	Three Circuit	White
3020030	Three Circuit	Silver


Accessories

Code	Description
2049498	Beacon LED Coloured Gel Pack
2047193	Elongation Lens
2052940	Adjustable Barn Doors


LIGHT SOURCE INCLUDED



4,000K





4,000K



Dimensions (mm)



Architecture Institute - Rotterdam, Netherlands



Adjustable Barn Doors


- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- IR/UV - free light source without heat radiation
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming, Trailing Edge and Dali Dimming as standard from 100-3% output
- Fresnel lens for collimating narrow beam for accent lighting
- 30° beam angle
- Beacon offers high CRI minimum 80 (typical 85), ideal for museums, galleries and high end shop lighting applications

LIGHT SOURCE INCLUDED



Beacon LED Flood 3,000K


Code	Description	Colour
2048782	Trailing Edge Single Circuit	White
2049465	On board Dimming Single Circuit	White
2048770	Trailing Edge Three Circuit	White
2048797	On board Dimming Three Circuit	White
2048783	Trailing Edge Single Circuit	Silver
2049466	On board Dimming Single Circuit	Silver
2048771	Trailing Edge Three Circuit	Silver
2048798	On board Dimming Three Circuit	Silver
2048784	Trailing Edge Single Circuit	Black
2049467	On board Dimming Single Circuit	Black
2048772	Trailing Edge Three Circuit	Black
2048799	On board Dimming Three Circuit	Black



4,000K

Beacon LED Flood 4,000K

Code	Description	Colour
2048785	Trailing Edge Single Circuit	White
2048786	Trailing Edge Single Circuit	Silver
2048787	Trailing Edge Single Circuit	Black
2049468	On board Dimming Single Circuit	White
2049469	On board Dimming Single Circuit	Silver
2049470	On board Dimming Single Circuit	Black
2048773	Trailing Edge Three Circuit	White
2048774	Trailing Edge Three Circuit	Silver
2048775	Trailing Edge Three Circuit	Black
2048801	On board Dimming Three Circuit	White
2048802	On board Dimming Three Circuit	Silver
2048803	On board Dimming Three Circuit	Black



4,000K

Beacon LED Flood DALI

Code	Description	Colour
2051564	13W 3,000K DALI	White
2051567	13W 4,000K DALI	White
2051565	13W 3,000K DALI	Silver
2051568	13W 4,000K DALI	Silver
2051566	13W 3,000K DALI	Black
2051569	13W 4,000K DALI	Black

Monopoint - For surface mounting on to ceiling and walls


Code	Description	Colour
3020010	Three Circuit	White
3020030	Three Circuit	Silver

Accessories


Code	Description
2049498	Beacon LED Coloured Gel Pack
2049499	Elongation Lens
2052940	Adjustable Barn Doors
2047194	Beacon Honeycomb Filter



Ulster Folk & Transport Museum - Ulster, Northern Ireland



Dimensions (mm)



Adjustable Barn Doors


- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- 3,000K 328lm 30 deg
- IR/UV – free light source without heat radiation
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming from 100-3% output
- Fresnel lens for collimating narrow beam for accent lighting
- Beacon Accent version offers high CRI, minimum 90 (typical 95) ideal for museums, galleries and high end shop lighting applications with on-board dimming

LIGHT SOURCE INCLUDED



Beacon LED Accent Spot 3,000K


Code	Description	Colour
2049462	On board Dimming Single Circuit	White
2048794	On board Dimming Three Circuit	White
2049463	On board Dimming Single Circuit	Silver
2048795	On board Dimming Three Circuit	Silver
2049464	On board Dimming Single Circuit	Black
2048796	On board Dimming Three Circuit	Black



3,000K

Beacon LED Accent Flood 3,000K

Code	Description	Colour
2049471	On board Dimming Single Circuit	White
2048804	On board Dimming Three Circuit	White
2049472	On board Dimming Single Circuit	Silver
2048805	On board Dimming Three Circuit	Silver
2049473	On board Dimming Single Circuit	Black
2048806	On board Dimming Three Circuit	Black




3,000K

Monopoint - For surface mounting on to ceiling and walls

Code	Description	Colour
3020010	Three Circuit	White
3020030	Three Circuit	Silver

Accessories

Code	Description
2049498	Beacon LED Coloured Gel Pack
2049499	Beacon Flood Lens (To give 40° beam)
2047193	Elongation Lens
2052940	Adjustable Barn Doors
2047194	Beacon Honeycomb Filter





Adjustable Barn Doors

- High output high efficiency LED spotlight range 26W 3,000K 1916 lumens
- Beacon offers high CRI, minimum 80 (typical 85), ideal for museums, galleries and high end shop lighting applications
- Cutting-edge cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV - free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming, Trailing Edge and Dali as standard from 100-3% output
- Fresnel lens for collimating narrow beam for accent lighting
- 10° beam angle

LIGHT SOURCE INCLUDED



Beacon LED High Output 26W Spot

3,000K High Output on Board Dimming - 26W

Code	Description	Type	Colour
2052789	3,000K O/B Dim Beacon 26W	L1 Spot	White
2052790	3,000K O/B Dim Beacon 26W	L1 Spot	Silver
2052791	3,000K O/B Dim Beacon 26W	L1 Spot	Black
2052807	3,000K O/B Dim Beacon 26W	L3 Spot	White
2052808	3,000K O/B Dim Beacon 26W	L3 Spot	Silver
2052809	3,000K O/B Dim Beacon 26W	L3 Spot	Black
2052825	3,000K O/B Dim Beacon 26W	SM Spot	White
2052826	3,000K O/B Dim Beacon 26W	SM Spot	Silver
2052827	3,000K O/B Dim Beacon 26W	SM Spot	Black

4,000K High Output on Board Dimming - 26W

Code	Description	Type	Colour
2052792	4,000K O/B Dim Beacon 26W	L1 Spot	White
2052793	4,000K O/B Dim Beacon 26W	L1 Spot	Silver
2052794	4,000K O/B Dim Beacon 26W	L1 Spot	Black
2052810	4,000K O/B Dim Beacon 26W	L3 Spot	White
2052811	4,000K O/B Dim Beacon 26W	L3 Spot	Silver
2052812	4,000K O/B Dim Beacon 26W	L3 Spot	Black
2052828	4,000K O/B Dim Beacon 26W	SM Spot	White
2052829	4,000K O/B Dim Beacon 26W	SM Spot	Silver
2052830	4,000K O/B Dim Beacon 26W	SM Spot	Black

3,000K High Output Trailing Edge Dimming - 26W

Code	Description	Type	Colour
2052753	3,000K Beacon 26W	L1 Spot	White
2052754	3,000K Beacon 26W	L1 Spot	Silver
2052755	3,000K Beacon 26W	L1 Spot	Black
2052765	3,000K Beacon 26W	L3 Spot	White
2052766	3,000K Beacon 26W	L3 Spot	Silver
2052767	3,000K Beacon 26W	L3 Spot	Black
2052777	3,000K Beacon 26W	SM Spot	White
2052778	3,000K Beacon 26W	SM Spot	Silver
2052779	3,000K Beacon 26W	SM Spot	Black

4,000K High Output Trailing Edge Dimming - 26W

Code	Description	Type	Colour
2052756	4,000K Beacon 26W	L1 Spot	White
2052757	4,000K Beacon 26W	L1 Spot	Silver
2052758	4,000K Beacon 26W	L1 Spot	Black
2052768	4,000K Beacon 26W	L3 Spot	White
2052769	4,000K Beacon 26W	L3 Spot	Silver
2052770	4,000K Beacon 26W	L3 Spot	Black
2052780	4,000K Beacon 26W	SM Spot	White
2052781	4,000K Beacon 26W	SM Spot	Silver
2052782	4,000K Beacon 26W	SM Spot	Black

3,000K High Output DALI Dimmable - 26W


Code	Description	Type	Colour
2052922	3,000K Beacon 26W	DALI Spot	White
2052923	3,000K Beacon 26W	DALI Spot	Silver
2052924	3,000K Beacon 26W	DALI Spot	Black

4,000K High Output DALI Dimmable - 26W

Code	Description	Type	Colour
2052739	4,000K Beacon 26W	DALI Spot	White
2052740	4,000K Beacon 26W	DALI Spot	Silver
2052741	4,000K Beacon 26W	DALI Spot	Black

Accessories


Code	Description
2049498	Beacon LED Coloured Gel Pack
2047193	Elongation Lens
2052940	Adjustable Barn Doors
2047194	Beacon Honeycomb Filter

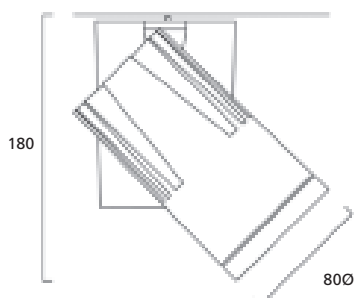

Dimensions (mm)

Beacon LED High Output Flood - 26W


Concord



Adjustable Barn Doors

- High output high efficiency LED spotlight range
- 26W 3,000K 1,938 lumens
26W 4,000K 2,230 lumens
- Beacon offers high CRI, minimum 80 (typical 85), ideal for museums, galleries and high end shop lighting applications
- Cutting-edge cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV - free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming, Trailing Edge and Dali as standard from 100-3% output
- Reflector with open front creating a 30° beam angle

LIGHT SOURCE INCLUDED



Beacon LED High Output 26W Flood

3,000K High Output on Board Dimming - 26W

Code	Description	Type	Colour
2052798	3,000K O/B Dim Beacon 26W	L1 Flood	White
2052799	3,000K O/B Dim Beacon 26W	L1 Flood	Silver
2052800	3,000K O/B Dim Beacon 26W	L1 Flood	Black
2052816	3,000K O/B Dim Beacon 26W	L3 Flood	White
2052817	3,000K O/B Dim Beacon 26W	L3 Flood	Silver
2052818	3,000K O/B Dim Beacon 26W	L3 Flood	Black
2052834	3,000K O/B Dim Beacon 26W	SM Flood	White
2052835	3,000K O/B Dim Beacon 26W	SM Flood	Silver
2052836	3,000K O/B Dim Beacon 26W	SM Flood	Black

3,000K High Output Trailing Edge Dimming - 26W

Code	Description	Type	Colour
2052759	3,000K Beacon 26W	L1 Flood	White
2052760	3,000K Beacon 26W	L1 Flood	Silver
2052761	3,000K Beacon 26W	L1 Flood	Black
2052771	3,000K Beacon 26W	L3 Flood	White
2052772	3,000K Beacon 26W	L3 Flood	Silver
2052773	3,000K Beacon 26W	L3 Flood	Black
2052783	3,000K Beacon 26W	SM Flood	White
2052784	3,000K Beacon 26W	SM Flood	Silver
2052785	3,000K Beacon 26W	SM Flood	Black

3,000K LED Flood DALI

Code	Description	Colour
2052931	3,000K Beacon 26W DALI Flood	White
2052932	3,000K Beacon 26W DALI Flood	Silver
2052933	3,000K Beacon 26W DALI Flood	Black

Accessories

Code	Description
2049498	Beacon LED Coloured Gel Pack
2052940	Adjustable Barn Doors
2047194	Beacon Honeycomb Filter

4,000K High Output on Board Dimming - 26W


Code	Description	Type	Colour
2052801	4,000K O/B Dim Beacon 26W	L1 Flood	White
2052802	4,000K O/B Dim Beacon 26W	L1 Flood	Silver
2052803	4,000K O/B Dim Beacon 26W	L1 Flood	Black
2052819	4,000K O/B Dim Beacon 26W	L3 Flood	White
2052820	4,000K O/B Dim Beacon 26W	L3 Flood	Silver
2052821	4,000K O/B Dim Beacon 26W	L3 Flood	Black
2052837	4,000K O/B Dim Beacon 26W	SM Flood	White
2052838	4,000K O/B Dim Beacon 26W	SM Flood	Silver
2052839	4,000K O/B Dim Beacon 26W	SM Flood	Black

4,000K High Output Trailing Edge Dimming - 26W

Code	Description	Type	Colour
2052762	4,000K Beacon 26W	L1 Flood	White
2052763	4,000K Beacon 26W	L1 Flood	Silver
2052764	4,000K Beacon 26W	L1 Flood	Black
2052774	4,000K Beacon 26W	L3 Flood	White
2052775	4,000K Beacon 26W	L3 Flood	Silver
2052776	4,000K Beacon 26W	L3 Flood	Black
2052786	4,000K Beacon 26W	SM Flood	White
2052787	4,000K Beacon 26W	SM Flood	Silver
2052788	4,000K Beacon 26W	SM Flood	Black

4,000K LED Flood DALI

Code	Description	Colour
2052742	4,000K Beacon 26W DALI Flood	White
2052743	4,000K Beacon 26W DALI Flood	Silver
2052744	4,000K Beacon 26W DALI Flood	Black

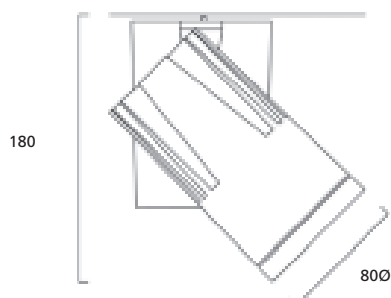

Dimensions (mm)



Discovery Museum - Newcastle, England




- High output high efficiency LED spotlight range
Accent Spot 26W 4,000K 767 lumens
Accent Flood 26W 4,000K 1,877 lumens
- Beacon Accent version offers high CRI, typical 97. Ideal for museums, galleries and high end shop lighting applications with on-board dimming
- For even more accurate colour reproduction our R9 figure is now typically 90
- IR/UV – free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming from 100-3% output
- Fresnel lens for collimating narrow beam for accent lighting
- Available in 10° and 30° Flood options


LIGHT SOURCE INCLUDED



Adjustable Barn Doors

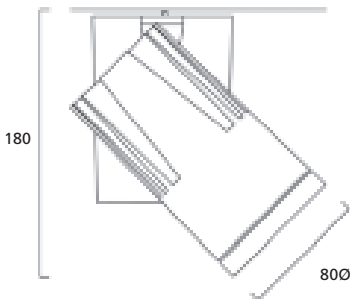


Dimensions (mm)

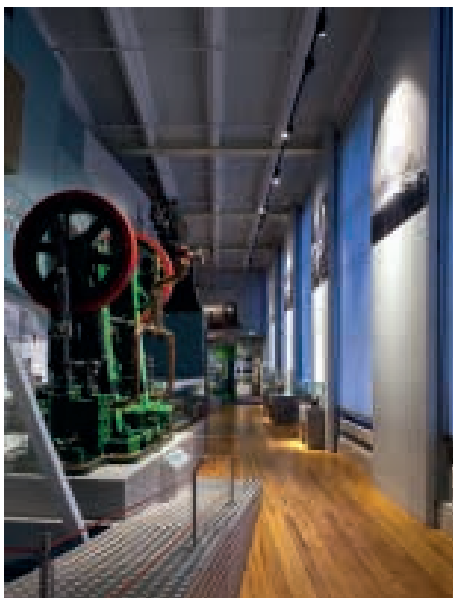


Discovery Museum - Newcastle, England

Beacon LED Accent 3,000K 26W Spot

Code	Description	Colour
2052795	Onboard Dimming Single Circuit	White
2052796	Onboard Dimming Single Circuit	Silver
2052797	Onboard Dimming Single Circuit	Black
2052813	Onboard Dimming Three Circuit	White
2052814	Onboard Dimming Three Circuit	Silver
2052815	Onboard Dimming Three Circuit	Black
2052831	Onboard Dimming Surface Mtd	White
2052832	Onboard Dimming Surface Mtd	Silver
2052833	Onboard Dimming Surface Mtd	Black



3,000K Spot



3,000K Flood

Beacon LED Accent 3,000K 26W Flood

Code	Description	Colour
2052804	Onboard Dimming Single Circuit	White
2052805	Onboard Dimming Single Circuit	Silver
2052806	Onboard Dimming Single Circuit	Black
2052822	Onboard Dimming Three Circuit	White
2052823	Onboard Dimming Three Circuit	Silver
2052824	Onboard Dimming Three Circuit	Black
2052840	Onboard Dimming Surface Mtd	White
2051841	Onboard Dimming Surface Mtd	Silver
2052842	Onboard Dimming Surface Mtd	Black

Beacon LED Accent 4,000K 26W Spot

Code	Description	Colour
2051473	Onboard Dimming Single Circuit	White
2051474	Onboard Dimming Single Circuit	Silver
2051475	Onboard Dimming Single Circuit	Black
2051479	Onboard Dimming Three Circuit	White
2051480	Onboard Dimming Three Circuit	Silver
2051481	Onboard Dimming Three Circuit	Black
2051509	Onboard Dimming Surface Mtd	White
2051510	Onboard Dimming Surface Mtd	Silver
2051511	Onboard Dimming Surface Mtd	Black

Beacon LED Accent 4,000K 26W Flood

Code	Description	Colour
2051476	Onboard Dimming Single Circuit	White
2051477	Onboard Dimming Single Circuit	Silver
2051478	Onboard Dimming Single Circuit	Black
2051482	Onboard Dimming Three Circuit	White
2051483	Onboard Dimming Three Circuit	Silver
2051484	Onboard Dimming Three Circuit	Black
2051512	Onboard Dimming Surface Mtd	White
2051513	Onboard Dimming Surface Mtd	Silver
2051514	Onboard Dimming Surface Mtd	Black

Accessories

Code	Description
2049498	Beacon LED Coloured Gel Pack
2049499	Beacon Flood Lens (To give 40° beam)
2047193	Elongation Lens
2052940	Adjustable Barn Doors
2047194	Beacon Honeycomb Filter



Spot L3 Track



Spot L3 Track



Spot Surface Mount


- Simple mains voltage LED spotlight perfect for the retail/shop lighting segment
- Direct connection to line voltage 200-240V, no need for external LED driver
- 13W Power Consumption
- Colour temperature: 3,000K and 4,000K
- Fixture Lumens: 594lm
- Available in Black and White
- Fresnel lens technology
- L1, L3 track and surface mount options

Beacon Minor Spot


Code	Description	Colour
Beacon Minor Spot - 3,000K		
2056160	Beacon Minor L1 SPT 3K WHT	White
2056161	Beacon Minor L1 SPT 3K BLK	Black
2056162	Beacon Minor L3 SPT 3K WHT	White
2056163	Beacon Minor L3 SPT 3K BLK	Black
2056164	Beacon Minor SM SPT 3K WHT	White
2056165	Beacon Minor SM SPT 3K BLK	Black

Beacon Minor Spot - 4,000K		
2056172	Beacon Minor L1 SPT 3K WHT	White
2056173	Beacon Minor L1 SPT 3K BLK	Black
2056174	Beacon Minor L3 SPT 3K WHT	White
2056175	Beacon Minor L3 SPT 3K BLK	Black
2056176	Beacon Minor SM SPT 3K WHT	White
2056177	Beacon Minor SM SPT 3K BLK	Black

LIGHT SOURCE INCLUDED



Beacon Spot 4,000K

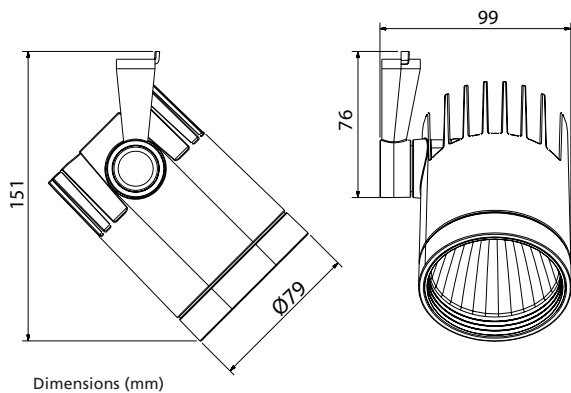

Morata de Tajuña pharmacy, Spain



Flood L3 Track





Flood L3 Track



Flood L1 Track

- Simple mains voltage LED spotlight perfect for the retail/shop lighting segment
- Uniform flood effect
- Direct connection to line voltage 200-240V, no need for external LED driver
- 13W Power Consumption
- Colour temperature: 3,000K and 4,000K
- Fixture Lumens: 623lm
- Available in Black and White
- L1, L3 track and surface mount options

LIGHT SOURCE INCLUDED




Beacon Flood 4,000K

Beacon Minor Flood

Code	Description	Colour
Beacon Minor Flood - 3,000K		
2056166	Beacon Minor L1 FLD 3K WHT	White
2056167	Beacon Minor L1 FLD 3K BLK	Black
2056168	Beacon Minor L3 FLD 3K WHT	White
2056169	Beacon Minor L3 FLD 3K BLK	Black
2056170	Beacon Minor SM FLD 3K WHT	White
2056171	Beacon Minor SM FLD 3K BLK	Black

Beacon Minor Flood - 4,000K

2056178	Beacon Minor L1 FLD 4K WHT	White
2056179	Beacon Minor L1 FLD 4K BLK	Black
2056180	Beacon Minor L3 FLD 4K WHT	White
2056181	Beacon Minor L3 FLD 4K BLK	Black
2056182	Beacon Minor SM FLD 4K WHT	White
2056183	Beacon Minor SM FLD 4K BLK	Black

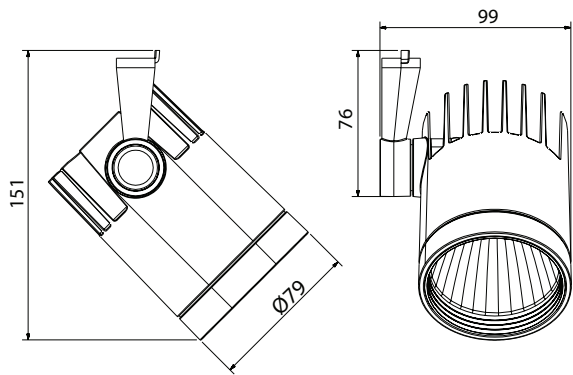

Dimensions (mm)



Zaraysk Kremlin Museum - Moscow, Russia



L1/L3 Track - Spot White



L1/L3 Track - Spot White



L1/L3 Track - Spot Black


- Simple mains voltage LED spotlight perfect for the retail/shop lighting segment
- Direct connection to line voltage 200-240V, no need for external LED driver
- 27W Power Consumption
- Colour temperature: 3,000K and 4,000K
- Fixture Lumens: 1279lm (3,000K & 4,000K spot)
- Available in Black and White
- L1, L3 track and surface mount options

LIGHT SOURCE INCLUDED




Beacon Major 3,000K - Spot

Code	Description	Colour
2056184	Beacon Major L1 SPT 3K WHT	White
2056185	Beacon Major L1 SPT 3K BLK	Black
2056186	Beacon Major L3 SPT 3K WHT	White
2056187	Beacon Major L3 SPT 3K BLK	Black
2056188	Beacon Major SM SPT 3K WHT	White
2056189	Beacon Major SM SPT 3K BLK	Black




Beacon Major 4,000K - Spot

Code	Description	Colour
2056196	Beacon Major L1 SPT 4K WHT	White
2056197	Beacon Major L1 SPT 4K BLK	Black
2056198	Beacon Major L3 SPT 4K WHT	White
2056199	Beacon Major L3 SPT 4K BLK	Black
2056200	Beacon Major SM SPT 4K WHT	White
2056201	Beacon Major SM SPT 4K BLK	Black

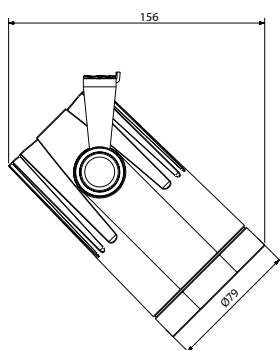


Dimensions (mm)

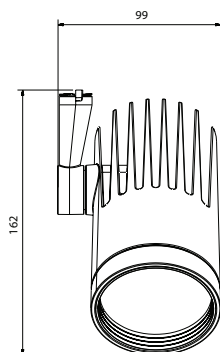

Joop! - Moscow, Russia



L1/L3 Track - Flood White



L1/L3 Track - Flood White



L1/L3 Track - Flood Black



L1/L3 Track - Flood Black


- Simple mains voltage LED spotlight perfect for the retail/shop lighting segment
- Uniform flood effect
- Direct connection to line voltage 200-240V, no need for external LED driver
- 27W Power Consumption
- Colour temperature: 3,000K and 4,000K
- Fixture Lumens: 1551lm
- Available in Black and White
- L1, L3 track and surface mount options

LIGHT SOURCE INCLUDED





Beacon Major 3,000K - Flood

Code	Description	Body Colour
2056190	Beacon Major L1 FLD 3K WHT	White
2056191	Beacon Major L1 FLD 3K BLK	Black
2056192	Beacon Major L3 FLD 3K WHT	White
2056193	Beacon Major L3 FLD 3K BLK	Black
2056194	Beacon Major SM FLD 3K WHT	White
2056195	Beacon Major SM FLD 3K BLK	Black



Beacon Major 4,000K - Flood

Code	Description	Body Colour
2056202	Beacon Major L1 FLD 4K WHT	White
2056203	Beacon Major L1 FLD 4K BLK	Black
2056204	Beacon Major L3 FLD 4K WHT	White
2056205	Beacon Major L3 FLD 4K BLK	Black
2056206	Beacon Major SM FLD 4K WHT	White
2056207	Beacon Major SM FLD 4K BLK	Black

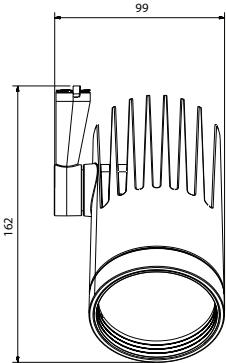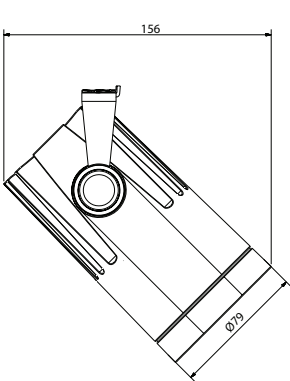

Dimensions (mm)





Beacon Wallwash LED utilizes a specially adapted asymmetric lens to provide a high quality wallwashing effect within any given display environment be it museums & galleries or retail. Uniform ceiling to floor vertical illuminance of up to 3.5 metres in height at 4.5 metre spacings.


Beacon Wallwash LED



Beacon Wallwash - White



Beacon Wallwash - Black



- Beacon Wallwash LED uses a specially adapted asymmetric lens to provide a punchy LED wallwash solution, upto 4,916lm
- Uniform ceiling to floor vertical illuminance up to 3.5m height at 4.5m spacings
- Ideal for museum and gallery applications
- High colour rendering index, Ra 95 typical or 85 (High output version) typical
- Available in 3000K or 4000K colour temperatures
- Non dimmable, On-board dimming and DALI versions available
- For mounting on 3-circuit track (Lytespan 3)
- White or Black paint finishes as standard. Other colours available on request.
- IR/UV free light source without heat radiation
- Long lifetime: 50,000 hours life at 70% of the original output (L70)

3,000K

Code	Description	Colour
2059065	BEACON WW LED 3K L3 BLK	Black
2059066	BEACON WW LED 3K L3 WHT	White
2059067	BEACON WW LED O/B DIM 3K L3 BLK	Black
2059068	BEACON WW LED O/B DIM 3K L3 WHT	White
2059073	BEACON WW LED DALI 3K L3 BLK	Black
2059074	BEACON WW LED DALI 3K L3 WHT	White

4,000K

Code	Description	Colour
2059080	BEACON WW LED 4K L3 BLK	Black
2059081	BEACON WW LED 4K L3 WHT	White
2059087	BEACON WW LED O/B DIM 4K L3 BLK	Black
2059088	BEACON WW LED O/B DIM 4K L3 WHT	White
2059094	BEACON WW LED DALI 4K L3 BLK	Black
2059095	BEACON WW LED DALI 4K L3 WHT	White

3,000K - High Output



Code	Description	Colour
2059101	BEACON WW LED HO 3K L3 BLK	Black
2059102	BEACON WW LED HO 3K L3 WHT	White

4,000K - High Output


Code	Description	Colour
2059108	BEACON WW LED HO 4K L3 BLK	Black
2059109	BEACON WW LED HO 4K L3 WHT	White

Legend: WW=WallWash; HO = High Output; O/B DIM = On-Board DIMming; L3 = Lytespan 3; WHT = WHiTe; BLK = BLAcK

LIGHT SOURCE INCLUDED




3,000K




4,000K

Beacon Wallwash (front view)



Beacon Wallwash (side view)



Dimensions (mm)



Mimos para tu bebé





Beacon Shelf is just as the name suggests - designed specifically for lighting shelving in retail and display applications. The 'scoop' style reflector and snoot focuses light on the products and display but also reduces glare whilst the customer is browsing through a store - enhancing the customers shopping experience.

Beacon Shelf



Beacon Shelf - White



Beacon Shelf - Black

- Beacon Shelf LED is designed specifically for illuminating shelving and product displays
- Ideal for retail and display applications upto 4,400lm
- Colour rendering index, Ra 93 typical
- Available in 3000K or 4000K colour temperatures
- Non dimmable and DALI versions available
- For mounting on 3-circuit track (Lytespan 3)
- White or Black paint finishes as standard. Other colours available on request.
- IR/UV free light source without heat radiation
- Energy Class: A++, A+, A
- Long lifetime: 50,000 hours life at 70% of the original output (L70)
- LED technology provides an energy efficient solution with reduced maintenance costs

Beacon Shelf - 3,000K


Code	Description	Colour
2093073	BEACON SHELF 3K L3 BLK	Black
2093074	BEACON SHELF 3K L3 WHT	White
2093075	BEACON SHELF 3K DALI L3 BLK	Black
2093076	BEACON SHELF 3K DALI L3 WHT	White

Beacon Shelf - 4,000K


Code	Description	Colour
2093077	BEACON SHELF 4K L3 BLK	Black
2093078	BEACON SHELF 4K L3 WHT	White
2093079	BEACON SHELF 4K DALI L3 BLK	Black
2093080	BEACON SHELF 4K DALI L3 WHT	White

Legend: L3 = Lytespan 3; WHT = WHiTe, BLK = BLAcK

LIGHT SOURCE INCLUDED




3,000K




4,000K

Beacon Shelf - front view



Beacon Shelf - side view



Dimensions (mm)










- Powerful LED spotlight
- Designed for museum and retail environments
- Ideal for double height spaces
- Unique adjustable lockable lens
- 15-50° Narrow beam or wide angle lens
- Retro industrial finish

* Available in black and white

LyteLab



- Unique adjustable lockable lens allows the beam angle to adjust from 15-50°
- Ideal for flexible retail and double height spaces
- Total power consumption 43W providing energy saving solutions when compared to existing 100W HIT Capsule
- 800Lux at 5m (20,000 cd's at 1m peak intensity)
- Dimmable via on board dimming and DALI driver options as standard
- Retro industrial finish – available in matt black and white
- 50K hours life @ 70% luminous flux providing maintenance free solutions
- CRI:85
- Architectural range of accessories including
 - Barn Doors
 - Elongation lens
 - Colour Filters
 - Honeycomb

LyteLab - Black


Code	Description	Colour
2054430	LyteLab 3K On Board Dim L1	Black
2054431	LyteLab 3K On Board Dim L3	Black
2054432	LyteLab 3K On Board Dim SM	Black
2054433	LyteLab 3K DALI Dim	Black
2054434	LyteLab 4K On Board Dim L1	Black
2054435	LyteLab 4K On Board Dim L3	Black
2054436	LyteLab 4K On Board Dim SM	Black
2054437	LyteLab 4K DALI Dim	Black

LyteLab - White

Code	Description	Colour
2057328	LyteLab 3K On Board Dim L1	White
2057329	LyteLab 3K On Board Dim L3	White
2057330	LyteLab 3K On Board Dim SM	White
2057331	LyteLab 3K DALI Dim L3	White
2057332	LyteLab 4K On Board Dim L1	White
2057333	LyteLab 4K On Board Dim L3	White
2057334	LyteLab 4K On Board Dim SM	White
2057335	LyteLab 4K DALI Dim L3	White

LyteLab accessories

Code	Description	Colour
2054438	LyteLab Adjustable Barn Doors	Black
2054440	LyteLab Elongation Lens	Black

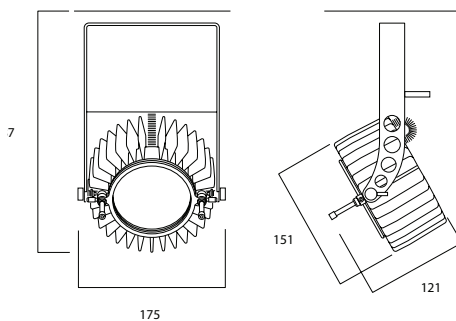


Dimensions (mm)


LIGHT SOURCE INCLUDED



Light distribution





LyteLab 4K 21°



LyteLab 4K 48°

Light distribution







TSSA		COCOA		COCOA		COCOA		COCOA	
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18
ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18	ESPRESSO	18



SNACKS
TSSA
READY TO EAT
TEO





Oprimo Large LED - White



Oprimo Small LED - Silver

Control Gear:	Electronic
Adjustment Angles:	0-90° tilt and 360° rotation
Track:	Available with Single or Three circuit track adaptor
Housing:	Die-cast aluminium chassis with Polycarbonate cover mouldings
Cover mouldings:	Available in Matte white, Silver & Matte black. Custom colours available upon request - please consult your local salesforce for more information

- The Optimo range can be tuned to enhance your unique retail and display application
- Innovative range of Spotlights with a coherent modern design language incorporating the latest light sources
- Truly complete range of Spotlights: Uses a wide range of lamp technologies: LED solid state light, latest Sylvania lamp technologies: HID lamps, MR16 Halogen lamps, GU10 RefLED Coolfit LED lamps and GU10 halogen lamps
- Twist & lock bezel design allows for quick and easy replacement of lamps, reflectors and / or filters
- Unique and innovative 2 tone colour combinations made possible by body and trim concept
- 3 standard colours: Matte white, Silver & Matte black (all with black chassis)
- Incorporating latest driver technology for increased efficiency
- Delivered fitted with 36° reflector (on LED & HID models only)
- 99.9% pure aluminium reflector for best possible efficiency
- Safety glass filters allow optimal efficiency

Optimo



Standard Colours



White

Black

Silver

Custom Colours
(available on request)



Satin Chrome

Matt Magenta



Powder Cyan

Tour Yellow

Features

- 36W LED spotlight
- High light output and efficiency up to 2,832lm and 79lm/W (luminaire output on 4,000K version)
- Unique passive heatsink design optimises thermal management allowing maximum performance, lumen maintenance and colour stability throughout the life of the product
- Available in warm white (3,000K) and neutral white (4,000K)
- Long life: 50,000 hours to L70
- LED binning of 3 MacAdam ellipses ensures colour consistency across your lighting scheme
- LED technology provides energy efficient solutions and reduced maintenance costs
- 80 CRI minimum
- No UV or IR radiation
- Instant light

LIGHT SOURCE INCLUDED




3,000K

Code	Description	Body Colour
Single circuit		
3089943	Optimo large LED WW LS1 WH	White
3089944	Optimo large LED WW LS1 BL	Black
3089945	Optimo large LED WW LS1 SI	Silver

Three circuit

3089946	Optimo large LED WW LS3 WH	White
3089947	Optimo large LED WW LS3 BL	Black
3089948	Optimo large LED WW LS3 SI	Silver

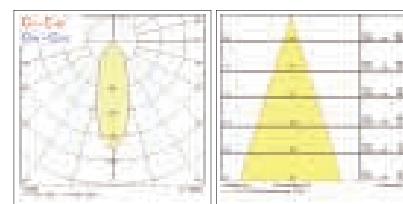


Warm white 3,000K

4,000K

Code	Description	Body Colour
Single circuit		
3089949	Optimo Large LED NW LS1 WH	White
3089950	Optimo Large LED NW LS1 BL	Black
3089951	Optimo Large LED NW LS1 SI	Silver

Three circuit

3089952	Optimo Large LED NW LS3 WH	White
3089953	Optimo Large LED NW LS3 BL	Black
3089954	Optimo Large LED NW LS3 SI	Silver

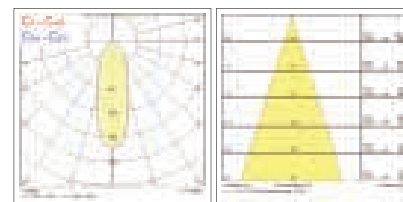


Neutral white 4,000K


Accessories

Code	Description
3089958	Optimo large LED 12° Reflector
3089962	Optimo large LED 24° Reflector
3089966	Optimo large LED 50° Reflector
3089970	Optimo large LED Meat filter
3089974	Optimo large LED Sun filter


Legend: WW = Warm White; NW = Neutral White; LS1 = Single circuit track = LS3 Three circuit track; WH = White; BL = Black; SI = Silver



24° reflector




50° reflector




Meat filter



Sun filter



Dimensions (mm)

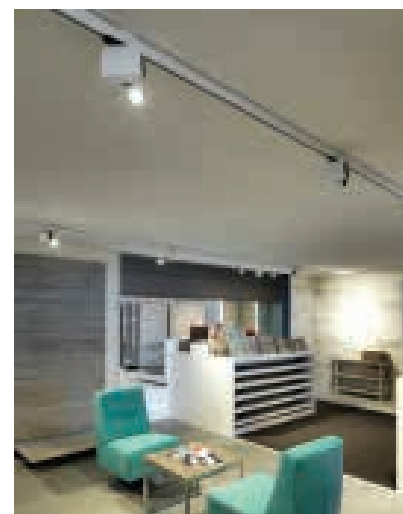

Standaard Vloerwerken - Gavere, Belgium



Standard Colours



White

Black

Silver

Custom Colours

(available on request)




Satin Chrome

Matt Magenta



Powder Cyan

Tour Yellow



12° reflector



24° reflector



50° reflector



Sun filter

Features

- 20W LED spotlight
- High light output and efficiency up to 1,589lm and 79lm/W (luminaire output on 4,000K lamp version)
- Unique passive heatsink design optimises thermal management allowing maximum performance, lumen maintenance and colour stability throughout the life of the product
- Available in warm white (3,000K) and neutral white (4,000K)
- LED binning of 3 MacAdam ellipses ensures colour consistency across your lighting scheme
- LED technology provides energy efficient solutions and reduced maintenance costs
- 80 CRI minimum
- No UV or IR radiation
- Instant light

LIGHT SOURCE INCLUDED




3,000K

Code	Description	Body Colour
Single circuit		
3089919	Optimo small LED WW LS1 WH	White
3089920	Optimo small LED WW LS1 BL	Black
3089921	Optimo small LED WW LS1 SI	Silver

Three circuit

3089922	Optimo small LED WW LS3 WH	White
3089923	Optimo small LED WW LS3 BL	Black
3089924	Optimo small LED WW LS3 SI	Silver

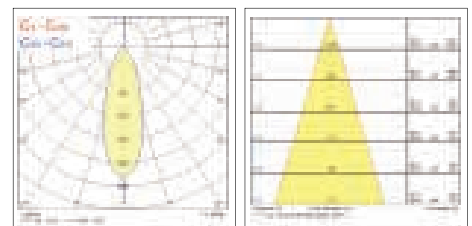

Warm white 3,000K


4,000K

Code	Description	Body Colour
Single circuit		
3089925	Optimo small LED NW LS1 WH	White
3089926	Optimo small LED NW LS1 BL	Black
3089927	Optimo small LED NW LS1 SI	Silver

Three circuit

3089928	Optimo small LED NW LS3 WH	White
3089929	Optimo small LED NW LS3 BL	Black
3089930	Optimo small LED NW LS3 SI	Silver


Legend: WW = Warm White; NW = Neutral White; LS1 = Single circuit track = LS3 Three circuit track; WH = White; BL = Black; SI = Silver

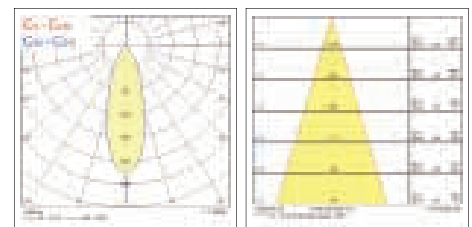

Neutral white 4,000K

Accessories

Code	Description
3089956	Optimo small LED 12° low Reflector
3089960	Optimo small LED 24° low Reflector
3089964	Optimo small LED 50° low Reflector
3089968	Optimo small LED Meat filter
3089969	Optimo small LED Sun filter



Dimensions (mm)



Jane D Style - Wagerem, Belgium