



PanelLED

Low profile LED recessed luminaire



The new **PanelLED** is a range of low profile LED recessed luminaires. The range is ideal for a multitude of applications, including hospitality, retail and corporate offices where a quick, simple and effective upgrade to LED illumination is desired.

PanelLED combines a slim profile (92mm) and high performance, making it a suitable

solution where ceiling void has previously prevented good overhead lighting.


Additionally, **PanelLED** offers protection to IP40 and LED technology, providing long lifetime (50,000 hours), energy efficient solution and reduced maintenance costs.

PanelLED

Low profile LED recessed luminaire

FEATURES:

- 44W LED recessed luminaires
- Designed for 600 x 600mm, 625 x 625mm or 1,200 x 300mm ceiling panels
- Brilliant even distribution of light
- Offers a high light output of up to 3,790lm
- Cost effective product - will help you comply with building regulations - up to 86.1lm/W
- Warm white (3,000K) or neutral white (4,000K)
- Slim profile of 92mm for minimal impact into ceiling void, make this an ideal LED upgrade solution
- Quick and easy to install
- Long lifetime - 50,000 hours
- LED technology provides energy efficient solution and reduced maintenance costs

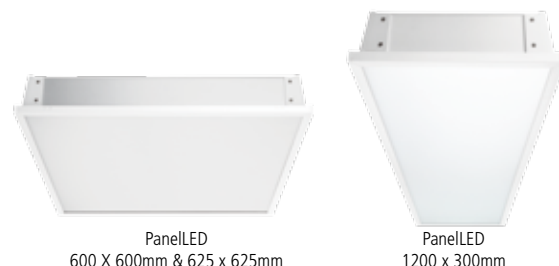

➔ For standard product, please order PanelLED + driver (0047568)

➔ For emergency products, please order: PanelLED + driver (0047568) + emergency driver (2654587)


PanelLED




Item code	Description	Body size (mm)	Body size (mm)	Ballast	Colour name	Colour temperature (K)	Voltage (V)	Drive current (mA)	Power consumption (W)	Lumen output (lm)	Lumen/Watt (lm/W)	Life (hours)
PanelLED - 600 x 600mm												
0047562	PanelLED 600 WW	600 x 600	White	Electronic	Warm white	3,000	220 - 240	1,200	44	3,589	82	50,000
0047563	PanelLED 600 NW	600 x 600	White	Electronic	Neutral white	4,000	220 - 240	1,200	44	3,790	86	50,000
PanelLED - 625 x 625mm												
0047566	PanelLED 625 WW	625 x 625	White	Electronic	Warm white	3,000	220 - 240	1,200	44	3,589	82	50,000
0047567	PanelLED 625 NW	625 x 625	White	Electronic	Neutral white	4,000	220 - 240	1,200	44	3,790	86	50,000
PanelLED - 1,200 x 300mm												
0047564	PanelLED 1200 WW	1200 x 300	White	Electronic	Warm white	3,000	220 - 240	1,200	46	3,418	74	50,000
0047565	PanelLED 1200 NW	1200 x 300	White	Electronic	Neutral white	4,000	220 - 240	1,200	46	3,716	81	50,000
PanelLED driver - to be ordered separately												
0047568	PanelLED Electronic driver			Electronic								
2656725	PanelLED dimmable driver			Analogue 1-10V dimmable & DALI dimmable								
2654587	PanelLED Emergency driver			Emergency								

Dimension (mm)


PanelLED - 600 x 600mm

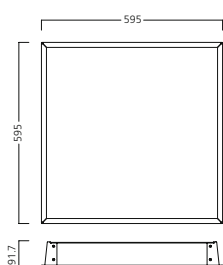

PanelLED - 625 x 625mm

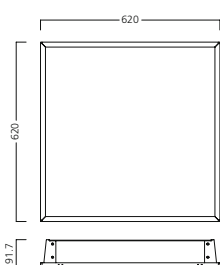


PanelLED - 1200 x 300mm

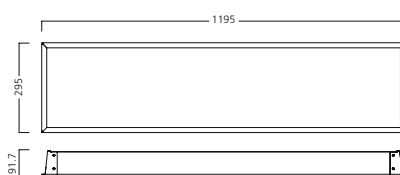

Photometric data

Panel LED
600 x 600mm - Neutral white



Panel LED
1,200 x 1,200mm - Neutral white

